Models: M9 & M11 UltraClave®



INTRODUCING THE RPI FIELD SERVICE CALIBRATION KIT TO FIT MIDMARK•RITTER M9 & M11

RPI Part #MIK074

OEM Part # (No OEM Part # Available)


FIELD SERVICE CALIBRATION KIT

- To check and adjust pressure and temperature
- · Includes all parts as shown
- All parts in kit are sold separately see below **Models:**

M9 (S/N Series: CZ, DA, DB, DX, DY, FD & OM)

M9D (S/N Series: FF & FG)

M11 (S/N Series: ES, ET, FP, FR & GB) M11D (S/N Series: GC & GD)

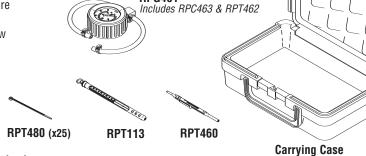

RPG461


All Parts in Kit Also Sold Separately - See Below!

RPI Part #RPG461 OEM Part #002-0372-00

TEST PRESSURE GAUGE

- Includes Gauge, Tubing (RPI Part #RPT462) and Kwik Clamps (RPI Part #RPC463)
- Dual gauge display: 0-60 psi/0-400 KPA
- Gauge has rubber cover protector
- Can be used on most sterilizers for inline pressure check

Models: M9 & M11



RPI Part #RPT113

OEM Part # (No OEM Part # Available)

MAX-REGISTER THERMOMETER

- Mercury
- Length: 5-1/2"
- Accuracy Rating: ±1 Division (±2°F)
- Range: 150°F to 350°F
- Includes Thermometer and metal protective case



RPI Part #RPT460

OEM Part # (No OEM Part # Available)

TRIM POT ADJUSTMENT TOOL

- 5" Long
- · Plastic with stainless steel blades
- Includes shirt pocket clip

Fits: Most trim pots



RPI Part #RPC476

OEM Part # (No OEM Part # Available)

CARRYING CASE

- Plastic case with foam inserts*
- Inside dimensions: 9.5"(L) x 6"(W) x 2.69 (D); Outside dimensions: 10.5"(L) x 7"(W) x 3"(D)
- *Note: When carrying case is purchased separately, the "pick-n-pluck" foam inserts can be customized by you to create your own storage design and a blank case lable is





CABLE TIE (HIGH TEMP)

- 25 per package
- Blue
- 1/8" x 4"
- Temperature rating: Up to 338°F

RPI Part #RPC463

OEM Part # (No OEM Part # Available)

KWIK™ CLAMPS

- 6 per package
- Temperature range: -40°F to 302°F
- Nylon®

Fits: 3/8" OD tubing



*See RPI Part #RPC476 below

RPI Part #RPT462

OEM Part # (No OEM Part # Available)

TUBING (SILBRADE)

- Sold per foot
- 1/8" ID x 3/8" OD
- · Silicone tubing with reinforced braid
- Max temp 350°F
- Working Pressure: 233 psi @ 70°F Fits: Barbed Fittings (1/8" diameter)



rpi

SECTION 10 PAGE

808
UPDATED

06/05